



US008337252B2

(12) **United States Patent**  
**Mambakkam et al.**

(10) **Patent No.:** **US 8,337,252 B2**  
(45) **Date of Patent:** **Dec. 25, 2012**

(54) **SMARTCONNECT FLASH CARD ADAPTER**

(75) Inventors: **Sreenath Mambakkam**, San Jose, CA (US); **Arockiyaswamy Venkidu**, Menlo Park, CA (US); **Larry Lawson Jones**, Palo Alto, CA (US)

(73) Assignee: **MCM Portfolio LLC**, Cupertino, CA (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **13/225,330**

(22) Filed: **Sep. 2, 2011**

(65) **Prior Publication Data**

US 2011/0320713 A1 Dec. 29, 2011

**Related U.S. Application Data**

(63) Continuation of application No. 12/759,550, filed on Apr. 13, 2010, now Pat. No. 8,011,964, which is a continuation of application No. 12/189,725, filed on Aug. 11, 2008, now Pat. No. 7,719,847, which is a continuation of application No. 11/858,086, filed on Sep. 19, 2007, now Pat. No. 7,522,424, which is a continuation of application No. 11/492,556, filed on Jul. 24, 2006, now Pat. No. 7,295,443, which is a continuation of application No. 10/887,635, filed on Jul. 8, 2004, now Pat. No. 7,095,618, which is a continuation-in-part of application No. 10/064,966, filed on Sep. 4, 2002, now Pat. No. 6,859,369, which is a continuation-in-part of application No. 10/167,925, filed on Jun. 11, 2002, now Pat. No. 7,222,205, which is a continuation of application No. 09/610,904, filed on Jul. 6, 2000, now Pat. No. 6,438,638, said application No. 10/064,966 is a continuation-in-part of application No. 10/039,685, filed on Oct. 29, 2001,

now Pat. No. 6,832,281, and a continuation-in-part of application No. 10/002,567, filed on Nov. 1, 2001, now abandoned.

(51) **Int. Cl.**  
**H01R 12/00** (2006.01)

(52) **U.S. Cl.** ..... **439/630**

(58) **Field of Classification Search** ..... 439/630, 439/946, 638, 76.1; 361/796, 752  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

3,821,518 A 6/1974 Miller  
3,882,296 A 5/1975 Townsend  
4,012,096 A 3/1977 Deluca et al.  
4,046,444 A 9/1977 Brorein

(Continued)

**FOREIGN PATENT DOCUMENTS**

CN 1278631 A 1/2001

(Continued)

**OTHER PUBLICATIONS**

Onspec Electronic, Inc., "Supplementary Search Report for EP Application No. 01952974.2, 3 pages", Sep. 21, 2004.

(Continued)


*Primary Examiner* — Jean F Duverne

(74) *Attorney, Agent, or Firm* — Edward P. Heller, III

(57) **ABSTRACT**

A multi-memory media adapter to read a plurality of different types of memory media cards. Signals are mapped to the contact pins depending upon the type of memory media card. In one embodiment, a controller connected to an interconnection means maps at least one signal to the contact pins depending upon the type of memory card inserted.

**9 Claims, 5 Drawing Sheets**

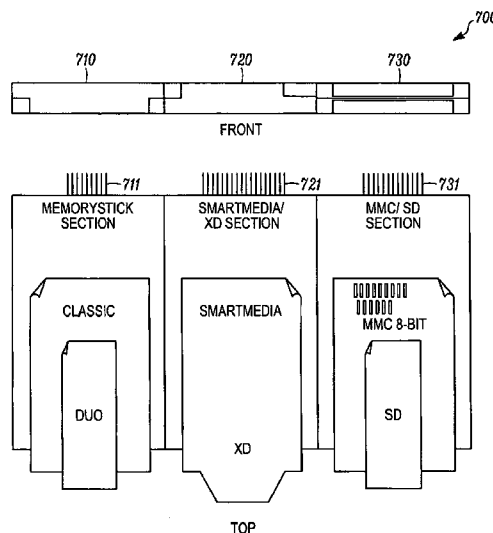

U.S. PATENT DOCUMENTS							
4,092,732	A	5/1978	Ouchi	5,630,174	A	5/1997	Stone et al.
4,131,330	A	12/1978	Stupay	5,640,541	A	6/1997	Bartram et al.
4,264,917	A	4/1981	Ugon	5,649,224	A	7/1997	Scheer
4,275,944	A	6/1981	Sochor	5,663,901	A	9/1997	Wallace et al.
4,327,953	A	5/1982	Slagel et al.	5,671,229	A	9/1997	Harari et al.
4,392,705	A	7/1983	Andrews, Jr. et al.	5,679,007	A	10/1997	Potdevin et al.
4,533,203	A	8/1985	Feldman et al.	5,680,579	A	10/1997	Young et al.
4,551,912	A	11/1985	Marks et al.	5,687,592	A	11/1997	Penniman et al.
4,578,573	A	3/1986	Flies et al.	5,708,799	A	1/1998	Gafken et al.
4,579,404	A	4/1986	Lockard	5,712,472	A	1/1998	Lee
4,591,222	A	5/1986	Shaffer	5,717,951	A	2/1998	Yabumoto
4,591,950	A	5/1986	Houpt	5,729,204	A	3/1998	Fackler et al.
4,655,526	A	4/1987	Shaffer	5,734,894	A	3/1998	Adamson et al.
4,675,787	A	6/1987	Suwa	5,740,349	A	4/1998	Hasbun et al.
4,677,527	A	6/1987	Pasterchick, Jr. et al.	5,748,913	A	5/1998	Shibahara
4,684,194	A	8/1987	Jenkins et al.	5,750,973	A	5/1998	Kaufman et al.
4,709,136	A	11/1987	Watanabe	5,752,857	A	5/1998	Knights
4,710,419	A	12/1987	Gregory	5,773,901	A	6/1998	Kantner
4,745,524	A	5/1988	Patton, III	5,786,769	A	7/1998	Coteus et al.
4,756,694	A	7/1988	Billman et al.	5,790,878	A	8/1998	Anderson et al.
4,767,920	A	8/1988	Kitta et al.	5,799,171	A	8/1998	Kondou
4,773,873	A	9/1988	Hillis	5,799,200	A	8/1998	Brant et al.
4,776,803	A	10/1988	Pretchel et al.	5,802,553	A	9/1998	Robinson et al.
4,781,612	A	11/1988	Thrush	5,805,834	A	9/1998	McKinley et al.
4,799,891	A	1/1989	Reichardt et al.	5,815,426	A	9/1998	Jigour et al.
4,801,561	A	1/1989	Sankhagowit	5,818,029	A	10/1998	Thomson
4,809,326	A	2/1989	Shigenaga	5,828,905	A	10/1998	Rao
4,811,482	A	3/1989	Moll	5,839,108	A	11/1998	Daberko et al.
4,822,988	A	4/1989	Gloton	5,844,910	A	12/1998	Nijima et al.
4,832,619	A	5/1989	Eck et al.	5,844,911	A	12/1998	Schadegg et al.
4,863,395	A	9/1989	Babuka et al.	5,846,092	A	12/1998	Feldman et al.
4,863,402	A	9/1989	Black et al.	5,847,372	A	12/1998	Kreft
4,868,047	A	9/1989	Hasegawa et al.	5,877,975	A	3/1999	Jigour et al.
4,900,273	A	2/1990	Pernet	5,877,986	A	3/1999	Harari et al.
4,900,903	A	2/1990	Wright et al.	5,887,145	A	3/1999	Harari et al.
4,938,716	A	7/1990	Chabrolle et al.	5,887,488	A	3/1999	Riggle
4,954,086	A	9/1990	Hill et al.	5,892,213	A	4/1999	Ito et al.
4,969,842	A	11/1990	Davis	5,905,253	A	5/1999	Ito et al.
4,975,086	A	12/1990	Reichardt et al.	5,905,888	A	5/1999	Jones et al.
5,126,548	A	6/1992	Sekiguchi	5,906,516	A	5/1999	Sato et al.
5,176,523	A	1/1993	Lai	5,909,596	A	6/1999	Mizuta
5,184,282	A	2/1993	Kaneda et al.	5,928,347	A	7/1999	Jones
5,198,645	A	3/1993	Martin et al.	5,928,370	A	7/1999	Asnaashari
5,200,959	A	4/1993	Gross et al.	5,929,416	A	7/1999	Dos Santos Pato et al.
5,220,488	A	6/1993	Denes	5,929,427	A	7/1999	Harada et al.
5,296,692	A	3/1994	Shino	5,930,496	A	7/1999	MacLaren et al.
5,297,148	A	3/1994	Harari et al.	5,933,328	A	8/1999	Wallace et al.
5,320,552	A	6/1994	Reichardt et al.	5,955,722	A	9/1999	Kurz et al.
5,336,877	A	8/1994	Raab et al.	5,956,473	A	9/1999	Ma et al.
5,375,084	A	12/1994	Begun et al.	5,961,652	A	10/1999	Thompson
5,387,131	A	2/1995	Foreman et al.	5,964,885	A	10/1999	Little et al.
5,394,206	A	2/1995	Cocca	5,974,426	A	10/1999	Lee et al.
5,396,617	A	3/1995	Villwock et al.	D416,541	S	11/1999	Hirai et al.
5,410,677	A	4/1995	Roskowski et al.	5,991,546	A	11/1999	Chan et al.
D359,724	S	6/1995	Baginy	5,995,376	A	11/1999	Schultz et al.
5,436,621	A	7/1995	Macko et al.	6,002,605	A	12/1999	Iwasaki et al.
5,437,020	A	7/1995	Wells et al.	6,006,295	A	12/1999	Jones et al.
5,471,038	A	11/1995	Eisele et al.	6,009,492	A	12/1999	Matsuoka
5,473,753	A	12/1995	Wells et al.	6,010,066	A	1/2000	Itou et al.
5,473,765	A	12/1995	Gibbons et al.	6,011,741	A	1/2000	Wallace et al.
5,485,606	A	1/1996	Midgdey et al.	6,015,093	A	1/2000	Barrett et al.
5,486,117	A	1/1996	Chang	6,026,007	A	2/2000	Jigour et al.
5,497,464	A	3/1996	Yeh	6,038,400	A	3/2000	Bell et al.
5,522,049	A	5/1996	Kimura et al.	6,041,001	A	3/2000	Estakhri
5,535,328	A	7/1996	Harari et al.	6,061,746	A	5/2000	Stanley et al.
5,538,436	A	7/1996	Garney	6,062,887	A	5/2000	Schuster et al.
D372,708	S	8/1996	Hetherington	6,067,234	A	5/2000	Kim et al.
5,561,628	A	10/1996	Terada et al.	6,075,706	A	6/2000	Learmonth et al.
5,576,698	A	11/1996	Card et al.	6,079,621	A	6/2000	Vardanyan et al.
5,584,043	A	12/1996	Burkart	6,088,755	A	7/2000	Kobayashi et al.
5,589,719	A	12/1996	Fiset	6,088,802	A	7/2000	Bialick et al.
5,594,233	A	1/1997	Kenneth et al.	6,097,605	A	8/2000	Klatt et al.
5,596,562	A	1/1997	Chen	6,102,715	A	8/2000	Centofante
5,596,569	A	1/1997	Madonna et al.	6,108,730	A	8/2000	Dell et al.
5,596,659	A	1/1997	Normile et al.	6,109,931	A	8/2000	Yotsutani
5,604,917	A	2/1997	Saito et al.	6,110,576	A	8/2000	Decker et al.
5,619,660	A	4/1997	Scheer et al.	6,112,014	A	8/2000	Kane
5,625,534	A	4/1997	Okaya et al.	6,122,175	A	9/2000	Shieh
				6,132,223	A	10/2000	Seeley et al.

6,134,114	A	10/2000	Ungermann et al.	6,532,152	B1	3/2003	White et al.
6,137,710	A	10/2000	Iwasaki et al.	6,535,997	B1	3/2003	Janson et al.
6,139,338	A	10/2000	Hirai et al.	6,540,523	B1	4/2003	Kung et al.
6,145,046	A	11/2000	Jones	6,557,754	B2	5/2003	Gray et al.
6,164,538	A	12/2000	Furuya et al.	6,561,421	B1	5/2003	Yu
6,168,077	B1	1/2001	Gray et al.	6,567,875	B1	5/2003	Williams et al.
6,170,029	B1	1/2001	Kelley et al.	6,568,960	B2	5/2003	Bricaud et al.
6,170,066	B1	1/2001	See	6,570,767	B1	5/2003	Vapaakoski et al.
6,173,291	B1	1/2001	Jenevein	6,578,125	B2	6/2003	Toba
6,173,405	B1	1/2001	Nagel	6,581,830	B1	6/2003	Jelinek et al.
6,174,188	B1	1/2001	Martucci	6,595,803	B2	7/2003	Akagi et al.
6,175,517	B1	1/2001	Jigour et al.	6,599,147	B1	7/2003	Mills et al.
6,176,721	B1	1/2001	Gottardo et al.	6,601,124	B1	7/2003	Blair
6,179,638	B1	1/2001	Lim	6,607,405	B2	8/2003	Nishimura
6,182,162	B1	1/2001	Estakhri et al.	6,607,707	B2	8/2003	Reichman et al.
6,189,055	B1	2/2001	Eisele et al.	6,612,492	B1	9/2003	Yen
6,190,182	B1	2/2001	Liebenow et al.	6,612,498	B1	9/2003	Lipponen et al.
6,199,122	B1	3/2001	Kobayashi	6,628,524	B1	9/2003	Washino et al.
6,202,932	B1	3/2001	Rapeli	6,641,413	B2	11/2003	Kuroda
6,203,378	B1	3/2001	Shobara et al.	6,642,614	B1	11/2003	Chen
6,206,710	B1	3/2001	Chen	6,651,149	B1	11/2003	Iwasaki
6,226,202	B1	5/2001	Kikuchi	6,654,841	B2	11/2003	Lin
6,230,226	B1	5/2001	Hu et al.	6,658,202	B1	12/2003	Battaglia et al.
6,234,844	B1	5/2001	Somerville et al.	6,658,516	B2	12/2003	Yao
6,243,686	B1	6/2001	McPherson et al.	6,658,638	B2	12/2003	Shau
6,246,578	B1	6/2001	Wei et al.	6,661,454	B1	12/2003	Hwang et al.
6,247,947	B1	6/2001	Knoernschild et al.	6,663,007	B1	12/2003	Sun et al.
6,261,113	B1	7/2001	Chen	6,666,724	B1	12/2003	Lwee
6,264,506	B1	7/2001	Yasufuku et al.	6,668,077	B1	12/2003	Ohkubo
6,266,724	B1	7/2001	Harari et al.	6,669,487	B1	12/2003	Nishizawa et al.
6,279,061	B1	8/2001	Aoki et al.	6,675,233	B1	1/2004	Du et al.
6,279,069	B1	8/2001	Robinson et al.	6,681,991	B1	1/2004	Li
6,282,612	B1	8/2001	Sakajiri et al.	6,684,283	B1	1/2004	Harris et al.
6,283,376	B1	9/2001	Schuder et al.	6,687,778	B2	2/2004	Ito et al.
6,285,555	B1	9/2001	O'Neal et al.	6,688,521	B2	2/2004	Cheng
6,292,863	B1	9/2001	Terasaki et al.	6,699,053	B2	3/2004	Kuroda
6,307,538	B1	10/2001	Bacon	6,699,061	B2	3/2004	Abe et al.
6,311,290	B1	10/2001	Hasbun et al.	6,701,058	B1	3/2004	Tsubaki
6,315,207	B1	11/2001	Eisele et al.	6,705,529	B1	3/2004	Kettunen et al.
6,315,582	B1	11/2001	Nishio et al.	6,718,274	B2	4/2004	Huang et al.
6,317,352	B1	11/2001	Halbert et al.	6,722,572	B2	4/2004	Ono et al.
6,330,688	B1	12/2001	Brown	6,725,286	B2	4/2004	Takahashi
6,337,712	B1	1/2002	Shiota et al.	6,725,291	B2	4/2004	Lai et al.
6,352,445	B2	3/2002	Takei et al.	6,735,720	B1	5/2004	Dunn et al.
6,353,870	B1	3/2002	Mills et al.	6,738,259	B2	5/2004	Le et al.
6,378,015	B1	4/2002	Yen	6,745,267	B2	6/2004	Chen et al.
6,381,513	B1	4/2002	Takase et al.	6,746,280	B1	6/2004	Lu et al.
6,381,662	B1	4/2002	Harari et al.	6,751,694	B2	6/2004	Liu et al.
6,385,667	B1	5/2002	Estakhri et al.	6,754,765	B1	6/2004	Chang et al.
6,385,677	B1	5/2002	Yao	6,761,313	B2	7/2004	Hsieh et al.
6,386,920	B1	5/2002	Sun	6,761,320	B1	7/2004	Chen
6,390,855	B1	5/2002	Chang	6,771,322	B1	8/2004	Neifer
6,393,524	B1	5/2002	Ayers	6,780,062	B2	8/2004	Liu et al.
6,402,259	B2	6/2002	Corio et al.	6,792,501	B2	9/2004	Chen et al.
6,402,529	B2	6/2002	Saito et al.	6,806,559	B2	10/2004	Gann et al.
6,402,558	B1	6/2002	Hung-Ju et al.	6,808,424	B2	10/2004	Kaneshiro et al.
6,404,323	B1	6/2002	Schrum et al.	6,820,148	B1	11/2004	Cedar et al.
6,405,323	B1	6/2002	Lin et al.	6,824,063	B1	11/2004	Wallace et al.
6,408,352	B1	6/2002	Hosaka et al.	6,830,474	B2	12/2004	Liu et al.
6,412,080	B1	6/2002	Fleming et al.	6,832,281	B2	12/2004	Jones et al.
6,426,801	B1	7/2002	Reed	6,836,885	B1	12/2004	Buswell et al.
6,427,186	B1	7/2002	Lin et al.	6,839,864	B2	1/2005	Mambakkam et al.
6,438,638	B1	8/2002	Jones et al.	6,842,818	B2	1/2005	Okamoto et al.
6,442,734	B1	8/2002	Hanson et al.	6,857,907	B1	2/2005	Hung et al.
6,456,491	B1	9/2002	Flannery et al.	6,859,361	B1	2/2005	Mambakkam et al.
6,457,647	B1	10/2002	Kurihashi et al.	6,859,369	B2	2/2005	Mambakkam et al.
6,460,094	B1	10/2002	Hanson et al.	6,863,572	B1	3/2005	Yi et al.
6,468,101	B2	10/2002	Suzuki	6,880,024	B2	4/2005	Chen et al.
6,470,284	B1	10/2002	Oh et al.	6,886,057	B2	4/2005	Brewer et al.
6,471,130	B2	10/2002	Iwasaki	6,901,457	B1	5/2005	Toombs et al.
6,477,604	B1	11/2002	Chen	6,915,956	B2	7/2005	Liu et al.
6,482,029	B2	11/2002	Nishimura	6,920,517	B2	7/2005	Mills et al.
6,490,163	B1	12/2002	Pua et al.	6,941,405	B2	9/2005	Morrow
6,496,381	B1	12/2002	Groeger	6,945,461	B1	9/2005	Hien et al.
6,519,739	B1	2/2003	Sandorfi	6,973,535	B2	12/2005	Bruner et al.
6,522,552	B1	2/2003	Lee	6,984,152	B2	1/2006	Mowery et al.
6,523,079	B2	2/2003	Kikinis et al.	7,000,054	B2	2/2006	Kwong et al.
6,523,132	B1	2/2003	Harari et al.	7,019,778	B1	3/2006	Prabhu et al.
6,524,137	B1	2/2003	Liu et al.	7,020,739	B2	3/2006	Mukaida et al.

7,033,221	B2	4/2006	Bricaud et al.	2003/0172263	A1	9/2003	Liu
7,036,738	B1	5/2006	Vanzini et al.	2003/0178486	A1	9/2003	Teng et al.
7,038,665	B1	5/2006	Pandana	2003/0201322	A1	10/2003	Wu
7,038,696	B2	5/2006	Emerson et al.	2003/0229745	A1	12/2003	Shih
7,062,584	B1	6/2006	Worrell et al.	2003/0229746	A1	12/2003	Liu et al.
7,065,591	B2	6/2006	Han et al.	2004/0027879	A1	2/2004	Chang
7,093,161	B1	8/2006	Mambakkam et al.	2004/0030830	A1	2/2004	Shimizu
7,095,618	B1	8/2006	Mambakkam et al.	2004/0042323	A1	3/2004	Moshayed
7,107,378	B1	9/2006	Brewer et al.	2004/0044864	A1	3/2004	Cavallo
7,114,659	B2	10/2006	Harari et al.	2004/0059782	A1	3/2004	Sivertsen
7,114,993	B2 *	10/2006	Chen ..... 439/630	2004/0060988	A1	4/2004	Sakamoto et al.
7,126,926	B1	10/2006	Bjorklund et al.	2004/0061780	A1	4/2004	Huffman
7,152,801	B2	12/2006	Cuellar et al.	2004/0062109	A1	4/2004	Wallace
7,162,547	B2	1/2007	Hosaka et al.	2004/0063464	A1	4/2004	Akram et al.
7,162,549	B2	1/2007	Mambakkam et al.	2004/0073736	A1	4/2004	Oh et al.
7,177,975	B2	2/2007	Toombs et al.	2004/0106326	A1	6/2004	Hsieh
7,191,270	B2	3/2007	Oh et al.	2004/0110423	A1	6/2004	Shishikura et al.
7,206,970	B1	4/2007	Lauterbach et al.	2004/0215862	A1	10/2004	Cedar et al.
7,222,205	B2 *	5/2007	Jones et al. .... 710/301	2005/0026505	A1	2/2005	Washino
7,231,643	B1	6/2007	Galbo et al.	2005/0273648	A1	12/2005	Mambakkam et al.
7,236,193	B2	6/2007	Suemoto et al.	2006/0050155	A1	3/2006	Ing et al.
7,252,240	B1	8/2007	Jones et al.	2006/0059385	A1	3/2006	Atri et al.
7,278,051	B2	10/2007	Mambakkam et al.	2006/0242460	A1	10/2006	Mambakkam et al.
7,295,443	B1	11/2007	Mambakkam et al.	2006/0253636	A1	11/2006	Jones et al.
7,320,071	B1	1/2008	Friedman et al.	2007/0180177	A1	8/2007	Jones et al.
7,365,782	B2	4/2008	Tanaka et al.	2007/0180291	A1	8/2007	Galbo et al.
7,367,503	B2	5/2008	Harai et al.	2007/0283069	A1	12/2007	Jones et al.
7,412,552	B2	8/2008	Jones et al.	2007/0283428	A1	12/2007	Ma et al.
7,493,437	B1	2/2009	Jones et al.	2007/0288677	A1	12/2007	Mambakkam et al.
7,522,424	B2	4/2009	Mambakkam et al.	2008/0009196	A1	1/2008	Mambakkam et al.
7,547,234	B2	6/2009	Wallace	2008/0017718	A1	1/2008	Jones et al.
7,594,064	B2	9/2009	Aasheim et al.	2008/0071978	A1	3/2008	Chow et al.
7,690,031	B2	3/2010	Ma et al.	2008/0220654	A1	9/2008	Guan et al.
7,809,866	B2	10/2010	Liu et al.	2008/0299809	A1	12/2008	Mambakkam et al.
7,885,123	B2	2/2011	Rolandi	2009/0100207	A1	4/2009	Jones et al.
2001/0004268	A1	6/2001	Kubo et al.	2010/0138606	A1	6/2010	Tanaka et al.
2001/0006400	A1	7/2001	Kubo et al.				
2001/0009505	A1	7/2001	Nishizawa et al.				
2001/0014934	A1	8/2001	Toba				
2001/0016887	A1	8/2001	Toombs et al.	DE	20109810	U1	8/2001
2001/0019077	A1	9/2001	Buschmann	EP	0549568	A2	6/1993
2001/0039603	A1	11/2001	Manowitz	EP	0744708	A2	11/1996
2002/0032813	A1	3/2002	Hosaka et al.	EP	0775964	A2	5/1997
2002/0040412	A1	4/2002	Estakhri et al.	EP	833083	A1	12/1998
2002/0065001	A1	5/2002	Sun	EP	0987876	A2	3/2000
2002/0065106	A1	5/2002	Bishop et al.	EP	1037159	A2	9/2000
2002/0069363	A1	6/2002	Winbum	EP	1043884	A1	10/2000
2002/0078297	A1	6/2002	Toyama et al.	EP	1139208	A1	10/2001
2002/0078458	A1	6/2002	Furon et al.	EP	1146473	A1	10/2001
2002/0080142	A1	6/2002	Takase et al.	EP	1152426	A2	11/2001
2002/0111771	A1	8/2002	Huang et al.	EP	0775964	A2	11/2003
2002/0113119	A1	8/2002	Bessel et al.	EP	0775964	B1	11/2003
2002/0166009	A1	11/2002	Lin	EP	1688864	A1	8/2006
2002/0178307	A1	11/2002	Pua et al.	EP	1146428	B1	1/2008
2002/0185533	A1	12/2002	Shieh et al.	EP	2085887	A1	8/2009
2003/0038177	A1	2/2003	Morrow	FR	2722589	A1	1/1996
2003/0041203	A1	2/2003	Jones et al.	FR	2696863	A1	4/1997
2003/0041284	A1	2/2003	Mambakkam et al.	GB	2263000	A	7/1993
2003/0046469	A1	3/2003	Liu et al.	GB	2298743	A	9/1996
2003/0056050	A1	3/2003	Moro	JP	03276382	A	12/1991
2003/0060085	A1	3/2003	Reece	JP	5108905	A	4/1993
2003/0070112	A1	4/2003	York	JP	6195524	A	7/1994
2003/0074529	A1	4/2003	Crohas et al.	JP	8235028	A	9/1996
2003/0082961	A1	5/2003	Mowery et al.	JP	10-154211	A	6/1998
2003/0084220	A1	5/2003	Jones et al.	JP	10512067	A	11/1998
2003/0084221	A1	5/2003	Jones et al.	JP	11-15928	A	1/1999
2003/0088868	A1	5/2003	Chang et al.	JP	11015928	A	1/1999
2003/0093606	A1	5/2003	Mambakkam et al.	JP	11053485	A	2/1999
2003/0095194	A1	5/2003	Suzuki et al.	JP	11-146328	A	5/1999
2003/0095386	A1	5/2003	Le et al.	JP	11184985	A	7/1999
2003/0109179	A1	6/2003	Kaneshiro et al.	JP	11321019	A	11/1999
2003/0112611	A1	6/2003	Nishizawa et al.	JP	11321020	A	11/1999
2003/0116624	A1	6/2003	Chen	JP	2000099206	A	4/2000
2003/0129944	A1	7/2003	Chang et al.	JP	2000181733	A	6/2000
2003/0133270	A1	7/2003	Liu et al.	JP	2000200652	A	7/2000
2003/0156303	A1	8/2003	Schnee et al.	JP	2000-214970	A	8/2000
2003/0167376	A1	9/2003	Koh	JP	2000235463	A	8/2000
2003/0168511	A1	9/2003	Lin	JP	2000-286564	A	10/2000
2003/0172219	A1	9/2003	Yao	JP	2001022537	A	1/2001
				JP	2001022538	A	1/2001

## FOREIGN PATENT DOCUMENTS

JP	2001-67303	A	3/2001
JP	2002-157056	A	5/2002
JP	2003-178269	A	6/2003
KR	0317885	B1	7/2002
TW	456624		9/2001
TW	464110		11/2001
TW	490889	B	6/2002
TW	495110		7/2002
WO	9834218	A2	8/1998
WO	WO9834218	A2	8/1998
WO	9859298	A1	12/1998
WO	9945461	A2	9/1999
WO	9948284	A1	9/1999
WO	0023936	A1	4/2000
WO	0106443	A1	1/2001
WO	0205102	A1	1/2001
WO	0180171	A1	10/2001
WO	0213021	A2	2/2002
WO	2004027617	A1	4/2004


## OTHER PUBLICATIONS

- Samsung, "Application Note for NAND Flash Memory", 1999.
- Atmel, "Atmel Multimedia Card Interface Datasheet, 2001", 2001.
- Burge, Legand L., et al., "A Ubiquitous Stable Storage for Mobile Computing Devices", Mar. 2001, pp. 401-404, Publisher: ACM, Proceedings of the 2001 ACM Symposium on Applied Computing.
- Galbraith, Rob, "Building the Ultimate Photo Recovery Kit, located at [http://www.robgalbraith.com/bins/content\\_page.asp?cid=7-4419-4501](http://www.robgalbraith.com/bins/content_page.asp?cid=7-4419-4501)", Jan. 23, 2002, pp. 1-20.
- Actiontec, "CameraConnect Pro", Oct. 29, 1998, p. 1.
- Actiontec, "CameraConnect Pro Parallel Port Flash Card Reader User's Manual", Oct. 28, 1999, pp. 1-29.
- CompactFlash Association, "CF+ and CompactFlash Specification; Rev. 1.4, 6 pages", Jul. 1999.
- CQ Publishing of Japan, "Interface (article and English translation)", Dec. 1, 1999, pp. 52-131.
- DataRescue sa/nv, Inc., "DataRescue Home Page, located at <http://web.archive.org/web/20010722191109/http://datarescue.com>", Jul. 22, 2001, p. 1.
- DataRescue sa/nv, Inc., "DataRescue PhotoRescue Specifications, located at <http://web.archive.org/web/20010827073251/www.datarescue.com/photorescue>", Aug. 27, 2001, pp. 1-2.
- Twice.com, "Digital Imaging Well Exposed at RetailVision, available online at [www.twice.com](http://www.twice.com)", Apr. 26, 1999, p. 1.
- Ontrack Data International, Inc., "EasyRecovery Professional Edition User Guide", 2000, pp. 1-45.
- Harper, "Electronic Packaging and Interconnection Handbook, 2nd Ed.", 1997, p. 3.25.
- Samsung, "K9D1208V0A-SSB0 Datasheet", 2001.
- Samsung, "K9S1208V0M-SSB0 Datasheet", 2001.
- Lexmark International, Inc., "Service Manual for 5000 and 5700 Color Jetprinter & 5770 Photo Jetprinter", Oct. 2000.
- Steve's Digicams, "Memorex CardMate PCF-100 Flash Memory Card Reader User Review", Apr. 12, 1999, pp. 1-5.
- Microtech International, Inc., "Microtech Digital Photography Solutions", Feb. 26, 2000, pp. 1-2.
- Microtech International, Inc., "Microtech PCD-47 SCSI Digital Film Reader", May 24, 2000, pp. 1-2.
- Steve's Digicams, "Microtech USB Camera Mate User Review", Sep. 5, 1999, pp. 1-4.
- "Microtouch Smart Media to PCMCIA Adapter Product Sheet", Jun. 5, 2000.
- Lexar Media Web Pages, "Parallel Port, Universal Readers, FAQ, Jumpshot", Jun. 5, 2000.
- Microtech International, Inc., "PCD-47 User's Manual, Version 1.1", May 24, 2000, pp. 1-35.
- Antec, Inc., "PhotoChute3 USB", Apr. 26, 1999, pp. 1-18.
- DataRescue sa/nv, Inc., "Photo Rescue User's Guide", 2001, pp. 1-8, vol. rev.1.0.
- Microtech International, Inc., "Press Release: Microtech Delivers Industry's First 3 Slot SCSI Digital Film Reader", Jan. 5, 2000, pp. 1-2.
- Microtech International, Inc., "Press Release: Microtech USB CameraMate Supports IBM Microdrive", Feb. 18, 1999, pp. 1-3.
- Intel Corporation, "PXA250 Datasheet", 2002.
- Intel Corporation, "PXA250 MMC Controller Application Note", 2002.
- Samsung, "SmartMedia White Paper", 2000.
- Texas Instruments, "TMS320VC5509 Fixed-Point Digital Signal Processor Data Manual, 2001-2003".
- Texas Instruments, "TMS320VC5509 Multi Media Controller Application Report", 2001.
- Winbond, "W86L388D Datasheet", 2001.
- DataFab Systems, Inc., "DataFab Systems Inc., Leading in Portable Storage Systems, Is Now Offering Dual-Slot CompactFlash and SmartMedia Card Reader," Sep. 10, 1999.
- Taiwan Patent Application No. 201032, Filed Aug. 4, 1992 (English Translation Included).
- Taiwan Patent Application No. 452152, Filed Nov. 15, 1999 (English Translation Included).
- Taiwan Patent Application No. 453560, Filed Mar. 23, 2000 (English Translation Included).
- Taiwan Patent Application No. 476170, Filed Nov. 7, 2000 (English Translation Included).
- Taiwan Patent Application No. 532611, Filed Dec. 28, 2001 (English Translation Included).
- Taiwan Patent Application No. 553510, Filed Jul. 4, 2002 (English Translation Included).
- Taiwan Patent Application No. 555256, Filed Aug. 27, 2002 (English Translation Included).
- Taiwan Patent Application No. I222028, Filed Jun. 7, 2002 (English Translation Included).
- Youtube.com (<http://www.youtube.com/watch?v=5Vr7YXDH4CQ>), "1999 Sony DSC-D770 Digital Flash Media Camera Pro", Mar. 27, 2012.
- Alcor Micro Corp., "AU9331 USB Secure Digital Card Reader Technical Reference Manual, Rev. 1.2", 2002.
- Atmel Corporation, "Atmel AT8xC51SNDIA Design Guide", 2002.
- Business Wire, "Addonics Technologies Announces Internal Seven-in-One Flash MC Reader for Any Computer With a 3.5-inch Drive Bay", Mar. 26, 2002.
- Phil Askey, "CARDport Swift Syncro (<http://www.dpreview.com/reviews/chaseswiftsyncro>)", Digital Photography Review, Aug. 2000.
- CNET, "Review of Toshiba MEA-110", CNET Reviews, Aug. 18, 2001.
- EDN, "Computers & Peripherals, 43, 23; ProQuest", Nov. 5, 1998, p. 244.
- Cypress, "Cypress SL11Ride USB to IDE/ATAPI Solution Data Sheet", Nov. 30, 2001.
- Epson America, Inc., "Epson Stylus Photo 825 Ink Jet Printer, Printer Basics Guide", Jul. 2002, pp. 1-114.
- Fujitsu, FR30 32-bit Microcontroller MB91101/MB91101A Hardware Manual, Fujitsu Semiconductor Controller Manual, Jan. 27, 2000.
- SCM Microsystems Inc., "Dazzle 6-in-1 Reader User's Manual", 2002, pp. 1-59.
- Jeff Keller, "DCRP Review: Panasonic ipalm PV-DC3000", Digital Camera Resource Page (<http://www.dcresource.com/reviews/panasonic/dc3000-review/>), Nov. 9, 2000.
- Delkin Devices, "eFilm Reader-5 User's Manual, Rev 1.2 (Delkin Part No. DDREADER-05)", 2000, pp. 1-12.
- Delkin Devices, "eFilm Reader-18 User's Manual Rev 1.0 (Delkin Part No. DDREADER-18)", 2002, pp. 1-12.
- Digitalway Co., Ltd., "MPIO FL 100 User's Guide", Dec. 2002, pp. 1-48.
- Genesys Logic, Inc., "GL813-USB2.0 CompactFlash Card Reader Controller Specification 1.2", Apr. 12, 2002.
- Genesys Logic, Inc., "GL816-USB2.0 CompactFlash Card Reader Controller", Sep. 20, 2002.
- Haruji Ishihara, "High-Density Flash Memory and Flash Memory Card", Hitachi Review, 1998, vol. 47, No. 4, pp. 148-153.
- Hewlett Packard, "HP Jornada 600 Series Handheld PC Quick Start Guide", 1999, pp. 1-2.
- Hyundai, "HMS31C2816 FC Controller Specification ver. 1.0", System IC SBU, SP BU, MCU Business Division, IDA Team, 2001.

- Anne-Bide Stensgaard, "Imation launches FlashGOI in the Middle East", [www.ameinfo.com](http://www.ameinfo.com), Mar. 11, 2002.
- Kyocera, "Instruction Manual for Kyocera Finecam S3 (Japanese)", available at least by Jun. 2001, pp. 1-91.
- Integrated Circuit Solution Inc., "IC1210-F128LQ—USB2.0 All-In-One Flash Card Reader Controller", 2002.
- Intel Corp., "Intel PXA250 and PXA210 Applications Processors: Electrical, Mechanical, and Thermal Specification Datasheet", Feb. 2002, pp. 1-46.
- Intel Corp., "Using SDCard and SDIO with the Intel PXA250 Applications Processor MMC Controller Application Note", Feb. 2002, pp. 1-16.
- Microtech International, Inc., "Instruction Manual for ZiO card reader (available through Kyocera as SDR-1)", Jun. 2001.
- M2 Presswire, "New Sitecom intetnal Multi-Memory Reader/Writer offers easy transfer of flash media data", Aug. 1, 2002.
- Digital Photography Review, "Microtech unveil ZiO!, Review of ZiO! Reader", Retrieved from <http://www.dpreview.com/news/2000/6/27/microtechzio>, Jun. 27, 2000.
- Peter Cohen, "Microtech ZiO! Works with Secure Digital Cards", Mac Publishing, LLC., [Macworld.com](http://www.macworld.com/article/1017398/zio.html) (Retreived from <http://www.macworld.com/article/1017398/zio.html>), May 7, 2001.
- Digital Photography Review, "Review of Dazzle Six in One USB card reader", (Retrieved from <http://www.dpreview.com/news/2001/10/24/dazzle6in1>), Oct. 24, 2001.
- Cade Metz, "Review of LaCie Hexa Media Drive", PCMAG.COM (<http://www.pcmag.com/article2/0,2817,3898,00.asp>), Jun. 30, 2002.
- Samsung Memory Product & Technology Division, "NAND/SmartMedia Technical Solution", Sep. 21, 2000.
- Neodio Technologies Corporation, "ND3060—Multi-Format Card Reader/Writer Controller with USB Interface Specification", Apr. 4, 2001.
- Olympus Optical Co.,Ltd., "Olympus Announces the Innovative 2.5 Megapixel C-2500L SLR Filmless Digital Camera", Aug. 24, 1999.
- Olympus Optical Co.,Ltd., "Olympus C-2500L Filmless Digital Camera Datasheet", 1999.
- Olympus Optical Co.,Ltd., "Olympus Camedia FlashPath Floppydisk Adapter MAFP-IE User's Manual", Dec. 2000.
- Olympus Optical Co.,Ltd., "Olympus Document No. 2679: C-2500L FAQ's", May 26, 2000.
- Olympus Optical Co.,Ltd., "Press Releases: Olympus Announces 32MB SmartMedia Card", Jun. 4, 1999.
- Ngee, MokHeng, "Put it in the Bin", Computer Times, COMPTI, Aug. 28, 2002.
- CSM GmbH, "OmniDrive Specification Sheet", Dec. 11, 2001, pp. 1-2.
- M. Wiley, "Panasonic ipalm PV-DC3000 Review", (<http://www.ign.com/articles/2001/10/12/panasonic-ipalm-pv-dc3000-review>), IGN Entertainment, Inc., Oct. 12, 2001.
- Panasonic, "PV-DC3000 Operating Instructions", Sep. 25, 2000, pp. 1-63.
- Impress R&D, "Product Overview of MEA110 Mobile Audio Player (Japanese)", Apr. 22, 2000.
- MMCA Technical Committee, "The MultiMediaCard System Summary, Based onSystem Specification Version 2.2", Jan. 2000, pp. 1-27.
- MMCA Technical Committee, "MultiMediaCard System Specification Version 2.11 Official Release", Jun. 1999 pp. 1-123.
- SCM Microsystems, "PC Card Reader/Writer PCD-47/PCD-47BH", May 1, 1999, pp. 1-35.
- Jason Cox, "Review of Microtech ZiO USB CompactFlash Card Reader", PCWorld (Retrieved from [http://www.pcworld.com/product/407107/microtech\\_zio\\_usb\\_compactflash\\_card\\_reader\\_rating.html?p=review](http://www.pcworld.com/product/407107/microtech_zio_usb_compactflash_card_reader_rating.html?p=review)), Feb. 1, 2001.
- Byrds Research & Publishing, Ltd, "Review of MindStor PSS-1705", iXBT Labs (<http://ixbtlabs.com/articles/mindstor/index.html>), Apr. 26, 2002.
- Ian Burley, "Review of OmniFlash Uno Mas Universal Card Reader", Digital Photography Now, (Retrieved from [http://dpnow.com/vintage/Features/Peripheral\\_reviews/perif2/perif2.html](http://dpnow.com/vintage/Features/Peripheral_reviews/perif2/perif2.html)), Mar. 6, 2002.
- Epinions.com, "Review of SmartDisk Dazzle 6-in-1 Reader (DM-8400)—The Dazzle DM-8400 Universal Flash Card Reader—A Jack of All Trade", ([http://www.epinions.com/review/cmhd-Components-All-SIX\\_IN\\_ONE\\_READER\\_W\\_DVD\\_S\\_W\\_DM8400/content\\_67507687044?sb=1](http://www.epinions.com/review/cmhd-Components-All-SIX_IN_ONE_READER_W_DVD_S_W_DM8400/content_67507687044?sb=1)), Jun. 20, 2002.
- Samsung Electronics Memory Product & Technology Division, "Flash / SmartMedia File System Presentation", Feb. 2, 2000.
- Samsung Electronics Memory Product & Technology Division, "Samsung presentation, SmartMedia Format Introduction (Software considerations)", Jul. 17, 1999.
- Samsung Electronics, "Samsung's ATA Flash Controllers Reference Design Manual", Jan. 23, 2001.
- Samsung Memory Product & Technology Division, "SmartMedia Application", Mar. 15, 2000.
- SanDisk Corporation, "SanDisk MultiMedia Card Product Manual Rev 2", 2000, pp. 1-86.
- SanDisk Corporation, "SmartMedia 32 Mbyte Product Manual Rev 1.1", 2001, pp. 1-54.
- Takada, Tomoji et al., "SD Card and SD Host Controller LSIs", Toshiba Review, Jan. 2002, vol. 57 No. 1 pp. 54-57.
- SD Association, "SD Card Specification, Simplified Version of: Part E1, Secure Digital Input/Output (SDIO) Card Specification", Oct. 2001.
- SD Group, "Supplementary Notes for: SD Memory Card Specifications, Part 1, Physical Layer Specification, Version 1.0", Jun. 2000.
- SD Association, "SD Memory Card File System Test Specification for SD Host Products, Version 1.0", Aug. 2001.
- SD Group, "SD Memory Card Simplified Specifications, Part 1 Physical Layer Specification, Version 0.96", Jan. 2000, pp. 1-28.
- SD Group, "SD Memory Card Specifications, Part 1, Physical Layer Specification, Version 1.0", Mar. 2000.
- STMicroelectronics, "ST92163 Preliminary Data", Jan. 2000.
- Steve's Digicam Online, Inc., "Review of Pixo Media 4-in-1 Multi PC-Card Adapter", Nov. 20, 2001.
- Steve's Digicams Online, Inc., "Review of AcomData Multiflash USB Flash Card Reader/Writer", Jul. 18, 2001.
- Steve's Digicams Online, Inc., "Review of BUSlink 6 in 1 Data Banker", Jan. 25, 2002.
- Steve's Digicams Online, Inc., "Review of Dazzle 6 in 1 Reader", Jan. 28, 2002.
- Steve's Digicam Online, Inc., "Review of Kyocera Finecam S-3", May 7, 2001.
- Steve's Digicam Online, Inc., "Review of LexarMedia USB Universal Card Reader", Jan. 22, 2001.
- Steve's Digicam Online, Inc., "Review of Panasonic iPalm PV-DC3000", Nov. 10, 2000.
- Steve's Digicam Online, Inc., "Review of Atech Flash Technology PRO II Flash Card Reader", ([http://www.steves-digicams.com/2002\\_reviews/aft\\_pro2.html](http://www.steves-digicams.com/2002_reviews/aft_pro2.html)), May 9, 2002.
- eMedia Asia Ltd., "TaiSol connector supports various media cards", EE Times Asia ([http://www.eetasia.com/ART\\_8800226933\\_499491\\_NP\\_eb07bea3.HTM](http://www.eetasia.com/ART_8800226933_499491_NP_eb07bea3.HTM)), Apr. 23, 2002.
- TaiSol Electronics, "International patent awarded for 4-in-1 flash memory connector", Jul. 1, 2002.
- Nan Barber, "The Aisle Less Traveled: A Macworld Expo Floor Report", MacDevCenter (<http://www.macdevcenter.com/>), O'Reilly Media, Inc., Jul. 18, 2002.
- Toshiba Corporation, "Toshiba Companion Chip for TMPR3922U TC6358TB(PLUM2) Technical Data", Oct. 19, 1998.
- Toshiba Corporation, "Toshiba Companion Chip for TX3922 PLUM2", Mar. 5, 1999.
- Toshiba Corporation, "Owner's Manual of MEA110 Mobile Audio Player", available at least by Apr. 22, 2000, pp. 1-45.
- Toshiba Corporation, "Toshiba SD Card Specification ver 2.11", May 31, 2002.
- Toshiba Corporation, "SD Memory Card/SmartMedia Inteface Controller TC6377BF/TC6384AF Specification", Jun. 25, 2001.
- Toshiba Corporation, "TC6374AF (3in1 ATA) PC Card ATA to SD Memory Card, Multimedia Card and SmartMedia Controller", Feb. 15, 2002.
- Toshiba Corporation, "SD Memory Card / SDIO Card / SmartMedia Controller TC6380AF Outline", Apr. 10, 2002.


- Wright, Mary, "To the Victor Will Go the Spoils in the Tiny-Flash-Card Battle", EDN Access, Jan. 16, 1997.
- STMicroelectronics, "USB Flash Card Writer Using ST92163", Nov. 2000.
- Viking Components, Inc., "Viking Intelliflash USB Flash Memory Reader User's Guide, Rev. B", May 2000.
- Digital Photography Review, "Viking Announce IntelliFlash USB Flash Memory Reader", (Retrieved from <http://www.dpreview.com/news/2000/3/21/viking>), Mar. 21, 2000.
- Tokyo Electron Device Limited, "TEL TE4300 data sheet", 2003, pp. 1-29.
- Kim, Jesung, et al., "A Space-Efficient Flash Translation Layer for Compactflash Systems", IEEE Transactions on Consumer Electronics, May 2002, vol. 48 No. 2 pp. 366-376.
- Toshiba Corporation, Product Overview of MEA110 Mobile Audio Player, available at least by Apr. 22, 2000, pp. 287-298.
- Texas Instruments, "Programming the TMS320VC5509 Multi Media Controller in Native Model—Application Report", Dec. 2001, pp. 1-13.
- Motorola, Inc. "MPC8260 Power QUICC II—User's Manual", Apr. 1999, pp. 1-490.
- Motorola, Inc. "MPC8260 Power QUICC II—User's Manual", Apr. 1999, pp. 491-1006.
- SCM Microsystems, "SCSI Interface: PCD-47 series" (archived from [www.scmmicro.com](http://www.scmmicro.com)), May 1, 1999, pp. 1-2.
- Atmel, "Multimedia Card Interface Datasheet", 2001.
- Intel, "PXA250 Datasheet", 2002.
- Hiroshi, Takeyama et al., "The favorite of next generation IC card, fundamental and application of multimedia card usage [First]", Interface Magazine, May 1, 2000, vol. 26, No. 5, pp. 166-174.
- Hiroshi, Takeyama et al., "The favorite of next generation IC card, fundamental and application of multimedia card usage [Second]", Interface Magazine, Jun. 1, 2000, vol. 26, No. 5, pp. 178-188.
- Alcor Micro Corp., "AU9360 USB Multiple Slots Flash Memory Card Reader Controller TRM, Datasheet Revision 1.2", Mar. 26, 2003.
- Atmel Corporation, "Atmel 32-bit Embedded ASIC Core Peripheral: Multimedia Card Interface (MCI) Datasheet", Dec. 2001.
- SCM Microsystems, "PC Card Reader/Writer PCD-47/PCD-47BH User's Manual, ver. 1.0", May 1, 1999, pp. 1-35.
- Steve's Digicams, Review of Atech Flash Technology PRO II Flash Card Reader, May 9, 2002.
- Investigation No. 337-TA-841, "Complainant Technology Properties Limited LLC's Responsive Claim Construction Brief", Jul. 23, 2012.
- Investigation No. 337-TA-841, "Complainant Technology Properties Limited LLC's Opening Claim Construction Brief", Aug. 3, 2012.
- Inv. No. 337-TA-841, Order Construing the Terms of the Asserted Claims of the Patents at ISSE, dated Oct. 4, 2012.
- Inv. No. 337-TA-841, Respondents' Notice of Prior Art, dated Aug. 31, 2012.
- US 7,264,513, 09/2007, Moshayedi (withdrawn)

\* cited by examiner

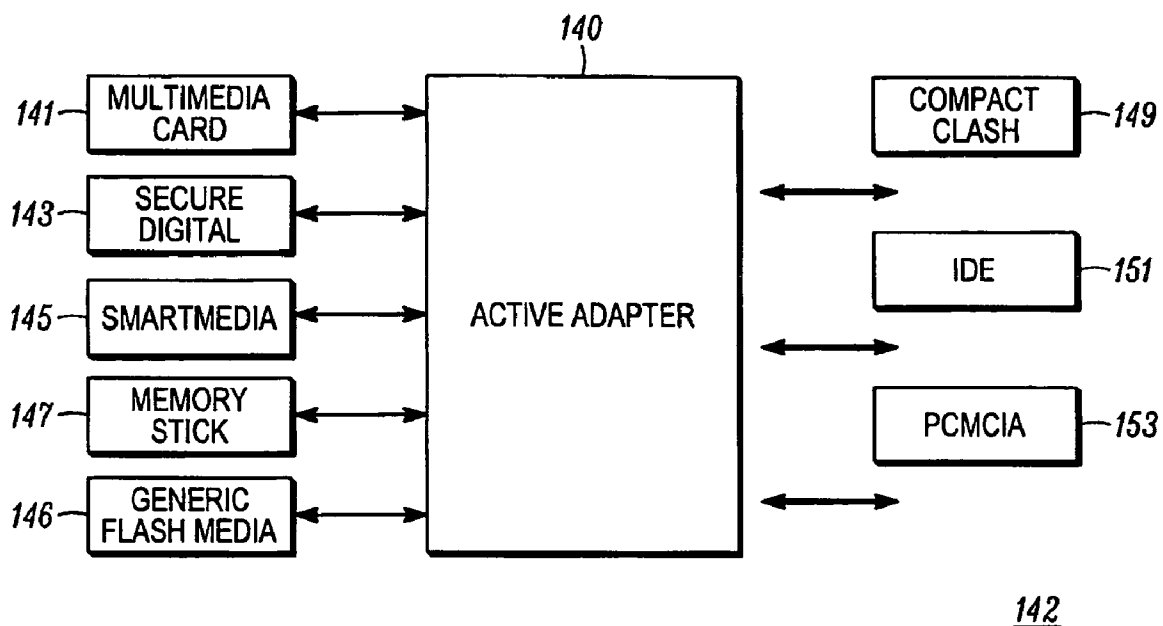

(PRIOR ART)


FIG. 1

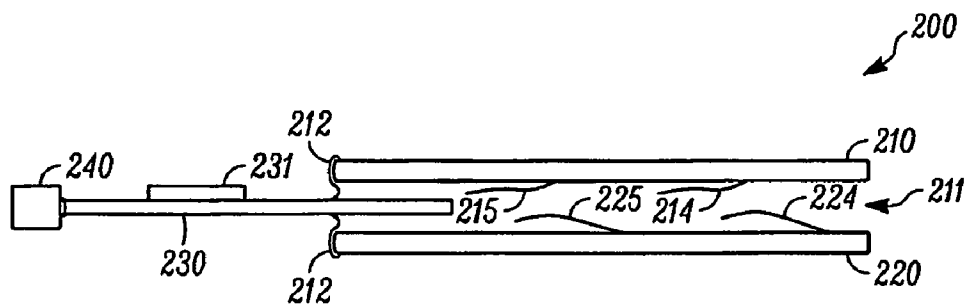

(PRIOR ART)

FIG. 2

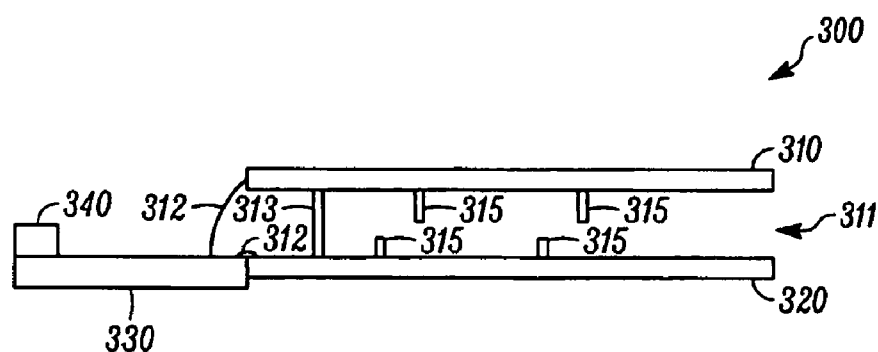

*FIG. 3*


## CONNECTOR PINS

PIN	SMART MEDIA	MMC/ SD	MEMORY STICK
1	D0/-WPSW		
2	D1	-WP	
3	D2	-CD	
4	D3	MCMD	
5	D4		-CD
6	D5		BS
7	D6		SDIO
8	D7		
9	LVD		
10	-WE	D0	
11	-RE	D1	
12	-ALE	D2	
13	-CLE	D3	
14	READY		
15	-CE		
16	-WP		
17	-WPSW		
18	GROUND	GROUND	GROUND
19	POWER		
20		POWER	POWER
21		CLK	MCLK

*FIG. 4*

PIN	XD	MMC/SD (REGULAR SIZE)	MEMORY STICK (REGULAR SIZE)	SMART MEDIA	MINISD	RS MMC	MEMORY STICK DUO
1	GROUND	GROUND	GROUND	GROUND	GROUND	GROUND	GROUND
2	-CD1						
3	RDY	MCMD	BS	RDY	MCMD	MCMD	BS
4	-RE	SD0	SDIO (MSD0)	-RE	SDD0	SDD0	SDIO (MSD0)
5	-CS	SD1	MSD1	-CS	SDD1	SDD1	MSD1
6	CLE	SD2	MSD2	CLE	SDD2	SDD2	MSD2
7	ALE	SD3	MSD3	ALE	SDD3	SDD3	MSD3
8	-WE	CLK	CLK	-WE	CLK	CLK	CLK
9	WP	-WP		WP			
10	D0	-CD2		D0			
11	D1		-CD3	D1			
12	D2			D2/-CD4			
13	D3			D3	-CD5		
14	D4			D4		-CD6	
15	D5			D5			-CD7
16	D6			D6/-WPSW			
17	D7			D7/LVD			
18	POWER	POWER	POWER	POWER	POWER	POWER	POWER

FIG. 5

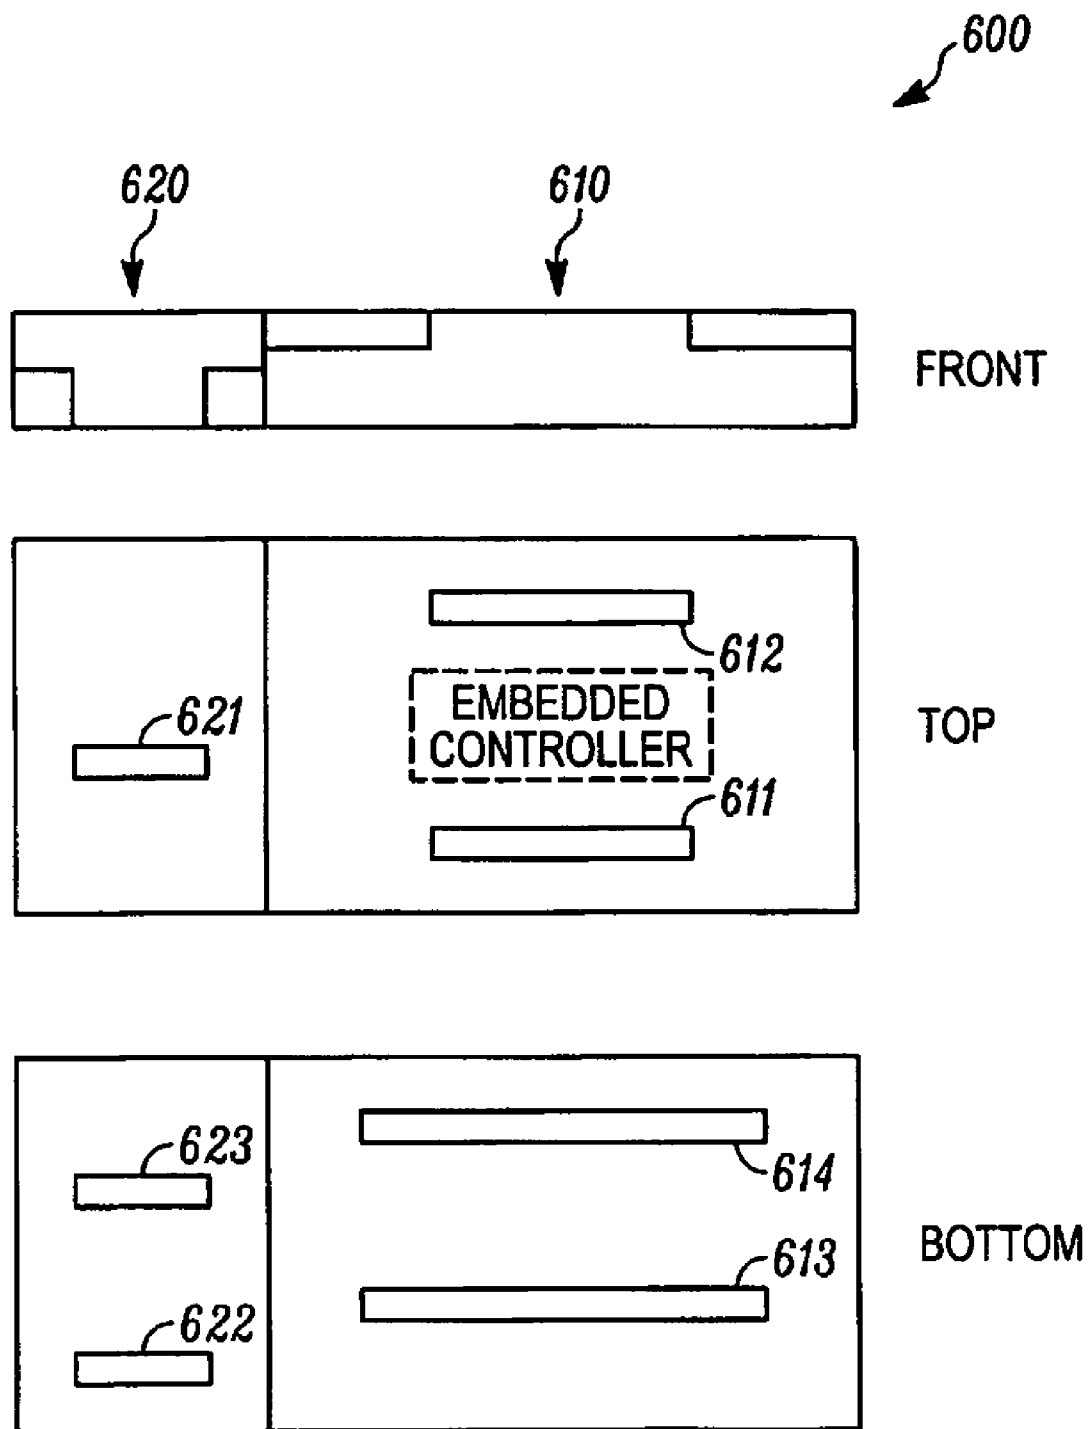

*FIG. 6*

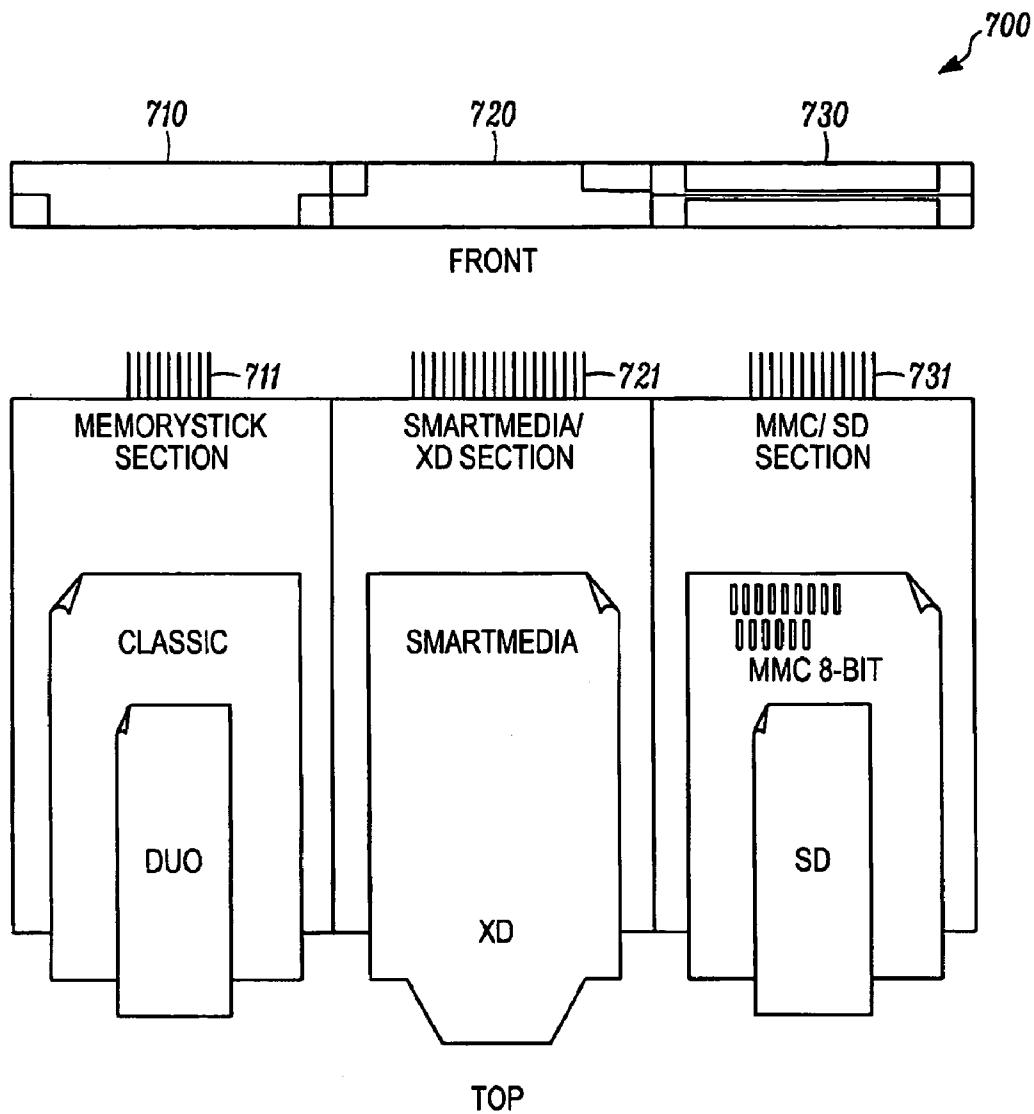


FIG. 7

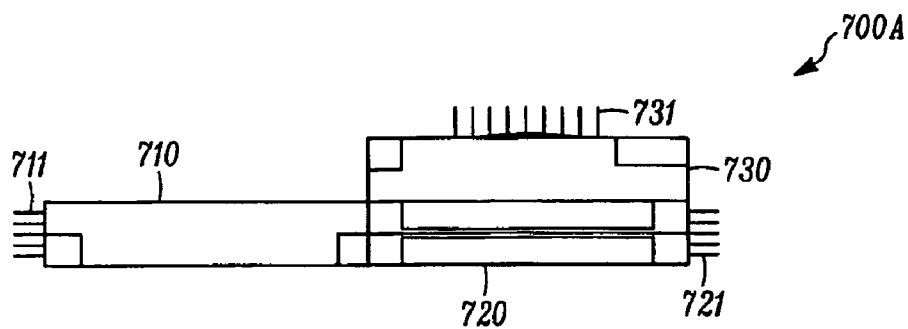


FIG. 7A

## SMARTCONNECT FLASH CARD ADAPTER

Under 35 U.S.C. § 120, this application is a continuation of U.S. application Ser. No. 12/759,550, filed Apr. 13, 2010, now U.S. Pat. No. 8,011,964, which is a continuation of U.S. application Ser. No. 12/189,725, filed Aug. 11, 2008, now U.S. Pat. No. 7,719,847, which is a continuation of U.S. patent application Ser. No. 11/858,086, filed Sep. 19, 2007, now U.S. Pat. No. 7,522,424, which is a continuation of U.S. application Ser. No. 11/492,556, filed Jul. 24, 2006, now U.S. Pat. No. 7,295,443, which is a continuation of U.S. application Ser. No. 10/887,635 filed Jul. 8, 2004, now U.S. Pat. No. 7,095,618, which is a continuation-in-part application of U.S. application Ser. No. 10/064,966, which was filed on Sep. 4, 2002, now U.S. Pat. No. 6,859,369, which is a continued-in-part continuation-in-part application of U.S. application Ser. No. 10/167,925, which was filed on Jun. 11, 2002, now U.S. Pat. No. 7,222,205, which is a continuation application of U.S. application Ser. No. 09/610,904 which was filed Jul. 6, 2000, now U.S. Pat. No. 6,438,638, and is titled "Flashtoaster for reading several types of flash memory cards with or without a PC." U.S. application Ser. No. 10/064,966 is also a continuation-in-part of U.S. application Ser. No. 10/039,685 which was filed Oct. 29, 2001, now U.S. Pat. No. 6,832,281 and is titled, "Flashtoaster for reading several types of flash memory cards with or without a PC" and a continuation-in-part of U.S. application Ser. No. 10/002,567 which was filed Nov. 1, 2001 and is titled, "Active Adapter Chip for Use in a Flash Card Reader." The priority of the above-referenced applications is hereby claimed, and the entireties of the above-referenced applications are incorporated herein by this reference, and all of the above-referenced applications are assigned to the assignee of the present invention.

## FIELD

The present invention relates generally to flash media adapters, and more specifically to an improved configuration of the same.

## BACKGROUND

In U.S. patent application Ser. No. 10/002,567, entitled "Active Adapter Chip for Use in a Flash Card Reader", filed Nov. 1, 2001, and assigned to the assignee of the present application, a universal active adapter chip is disclosed that can be used to construct a flash media system or various active flash media adapters using the CompactFlash card or PCMCIA (PC Card) form factor. A standard reader that reads CompactFlash cards or PC cards can then read any of the other flash-memory cards that plug into the CompactFlash or PC Card adapter. The adapters come with a conversion chip that makes each of the flash media work just like a CompactFlash or PC Card media, as applicable.

FIG. 1 shows a multi-standard card reader system 142. In the field of multi-standard adapters, multi-memory media adapter 140 may be an active adapter or, alternatively, may be a passive adapter. Reader 142 can adapt on the host side to either CompactFlash card 149, PCMCIA card 153, or IDE card 151. On the media side, the reader can adapt to a Multi-MediaCard 141, or a Secure Digital card 143, which have the same form factor but slightly different pin-out; a SmartMedia card 145, which has a different pin-out; or a Memory Stick 147. In general, the reader 142 can adapt to any generic flash media 146 that has a similar or smaller form factor.

It is possible to place the connector such that all the media sit in one opening. FIG. 2 is a cutaway side view of a PCM-

CIA adapter card 200 of the type that is available as a standard commercial product today. FIG. 2 illustrates several drawbacks in the typical configuration of a PCMCIA adapter. Adapter 200 includes two PCBs, namely PCB 210 and PCB 220. The two PCBs are separated by a mounting frame (typically plastic), not shown. The mounting frame acts as a spacer between PCB 210 and PCB 220, which holds the two PCBs together at a specified distance and functions in other capacities as described below. The space between the two PCBs creates the opening (port) 211 into which the flash media cards are inserted. PCB 230 is straddle-mounted between PCB 210 and PCB 220. PCB 230 contains the active components including controller chip 231 that perform handshaking and data transfer. PCB 230 is connected to a PCMCIA connector 240. PCB 230 is mounted between PCB 210 and PCB 220 with interconnects 212. PCB 210 has two sets of floating contact pins, contact pin set 214 includes nine contact pins and contact pin set 215 includes ten contact pins, which provide interfaces for MMC/SD and MemoryStick flash media respectively. PCB 220 has two sets of floating contact pins 224 and 225, each including 11 pins, which together provide the interface for SmartMedia flash media.

The mounting frame that holds PCB 210 and 220 together is configured such that each type of flash media is inserted in a particular location within the connector. In FIG. 2, opening 211 is a simplified view. Typically, the opening is stepped with different widths and heights in different locations that index the flash media cards into specific locations upon insertion. This allows each flash medium to be properly aligned with the corresponding contact pin set(s). Additionally, stops are typically provided to stop the insertion at the correct depth, again, to guarantee connection to the right contact pin set.

This typical approach has several serious drawbacks.

## 35 Manufacturing

The straddle-mount configured flash media adapter is very expensive to manufacture for several reasons. Often such devices require manual labor for manufacturing and testing, or the use of very expensive soldering robots, instead of standard production techniques. A further problem is the additive effect of manufacturing tolerances, such as primary connector (i.e., PCMCIA) to PCB, to straddle mount connector to secondary PCB to contacts on PCB, resulting in as many as two, three, or in some cases even four tolerances adding up, which makes requirements for tolerances either absurdly expensive, or causes a big yield problem in manufacturing. Additionally, PCB 230 must be thin enough so that it can be mounted between PCB 210 and PCB 220 in the space allocated for the insertion of the various flash media. That is, PCB 230, together with the interconnects 212 that mount it between PCB 210 and PCB 220 must be no larger than opening 211. The manufacture of thin PCBs to accommodate this design point adds to the expense and complexity of manufacturing the flash media adapter.

## 50 Contact Pins

The floating contact pins are subject to damage and deterioration. The various flash media cards have different thickness, and even the same flash media may have different thickness if produced by different manufacturers. The flash media cards exert pressure upon the floating contact pins, which eventually causes their resiliency to be reduced. When subsequently, a thinner flash media card is inserted into the flash media adapter, the corresponding contact pins may not make connection with the flash media card. Additionally if a flash media card is inserted incorrectly (e.g., upside down), removal of the flash media card may damage the contact pins. Interface

Some devices don't have the 68-pin PCMCIA interface. For example, some recent notebook computer models only have the electrically equivalent 50-pin CF interface. Typical adapter cards such as PCMCIA adapter card **200** are incompatible with a 50-pin CF interface.

### SUMMARY

An embodiment of the present invention provides a multi-memory media adaptor comprised of a first planar element having an upper surface and a lower surface and a second planar element having an upper surface and a lower surface. The two planar elements are formed from a single piece of molded plastic and disposed so as to form a port capable of receiving a memory media card. The adapter has at least one set of contact pins protruding from the lower surface of the first planar element or the upper surface of the second planar element such that the at least one set of contact pins are disposed within the port. The at least one set of contact pins are capable of contacting the contacts of a memory media card inserted into the port.

Other features and advantages of embodiments of the present invention will be apparent from the accompanying drawings, and from the detailed description, that follows below.

### BRIEF DESCRIPTION OF THE DRAWINGS

The invention may be best understood by referring to the following description and accompanying drawings that are used to illustrate embodiments of the invention. In the drawings:

FIG. **1** illustrates a multi-standard card reader system;

FIG. **2** is a cutaway side view of a PCMCIA adapter card of the type that is available as a standard commercial product today;

FIG. **3** is a cutaway side view of an integrated standard connector adapter card according to one embodiment of the present invention;

FIG. **4** is a table of pin mappings for the SmartMedia, MMC/SD, and Memory Stick to a 21-pin connector in accordance with one embodiment of the present invention;

FIG. **5** is a table of pin mappings for the xD, standard MMC/SD, standard Memory Stick, SmartMedia, miniSD, RSMMC, and MS Duo to an 18-pin connector in accordance with one embodiment of the present invention;

FIG. **6** illustrates an integrated standard connector adapter card, according to one embodiment of the present invention, in front view, top view, and bottom view;

FIG. **7** illustrates an integrated standard connector adapter card, according to one embodiment of the present invention, in front view and top view; and

FIG. **7A** illustrates an alternative embodiment of an adapter **700A** in accordance with one embodiment of the invention.

### DETAILED DESCRIPTION

An embodiment of the present invention provides a multi-memory media adapter card configured to reduce or eliminate some of the drawbacks of typical adapter card configuration. In accordance with various embodiments of the present invention, the top and bottom PCBs of prior art configurations are replaced by molded plastic elements that provide greater structural integrity. The straddle-mounted controller board is replaced with a PCB adjacent to the bottom element and having a surface mounted standard connector that may be a

PCMCIA or a CompactFlash connector. The contact pins are formed so as to better maintain their resiliency and avoid damage upon removal of the memory media card. In one embodiment, a light pipe is locked in place between the top and bottom elements of the adapter card so as to conduct light from a signal lamp on the PCB through the port.

It is an intended advantage of one embodiment of the present invention to reduce the manufacturing cost and complexity of an adapter card. It is another intended advantage of one embodiment of the present invention to provide an adapter card with greater structural integrity. It is another intended advantage of one embodiment of the present invention to provide an adapter card with contact pins that retain their resiliency to a greater degree than floating contact pins. It is another intended advantage of one embodiment of the present invention to provide an adapter card with contact pins that are less likely to be damaged upon removal of a memory media card. It is another intended advantage of one embodiment of the present invention to provide an adapter card with a surface mounted standard connector including PCMCIA and CompactFlash connectors.

In the following description, numerous specific details are set forth. However, it is understood that embodiments of the invention may be practiced without these specific details. In other instances, well-known circuits, structures and techniques have not been shown in detail in order not to obscure the understanding of this description.

Reference throughout the specification to "one embodiment" or "an embodiment" means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the present invention. Thus, the appearance of the phrases "in one embodiment" or "in an embodiment" in various places throughout the specification are not necessarily all referring to the same embodiment. Furthermore, the particular features, structures, or characteristics may be combined in any suitable manner in one or more embodiments.

Similarly, it should be appreciated that in the foregoing description of exemplary embodiments of the invention, various features of the invention are sometimes grouped together in a single embodiment, figure, or description thereof for the purpose of streamlining the disclosure and aiding in the understanding of one or more of the various inventive aspects. This method of disclosure, however, is not to be interpreted as reflecting an intention that the claimed invention requires more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive aspects lie in less than all features of a single foregoing disclosed embodiment. Thus, the claims following the Detailed Description are hereby expressly incorporated into this Detailed Description, with each claim standing on its own as a separate embodiment of this invention.

FIG. **3** is a cutaway side view of an integrated standard connector adapter card according to one embodiment of the present invention. Adapter card **300**, shown in FIG. **3**, includes a top planar element **310** and a bottom planar element **320**, both of which may be PCBs. Alternatively, the top planar element **310** and the bottom planar element **320** may be formed from molded plastic. A spacer, not shown, holds the two planar elements apart, forming port **311** into which memory media cards are inserted. In order to meet the low height requirements (thickness of PCMCIA or CF cards), the ports are registered on one opening, and contacts are distributed on both sides. Additionally, the port **311** may be formed with card stops to prevent improper insertion of memory media cards.

5

For one embodiment, both planar elements and the spacer between them are created from molded plastic. For such an embodiment, the molded plastic provides greater resistance to pressure applied to the outer surfaces of adapter card **300**. This helps to prevent planar element **310** and planar element **320** from contacting each other and possibly damaging internal components.

Adapter **300** also includes a number of sets of contact pins, shown collectively as contact pin set **315**, protruding from the lower surface of planar element **310** and from the upper surface of planar element **320**. The contact pins electrically couple to corresponding contacts on a memory media card inserted into port **311**. For an embodiment in which the planar elements **310** and **320** are formed from molded plastic, contact pin sets **315** may be formed from injected contacts with protruding pins. This provides a more robust contact pin than the floating contact pins of the prior art, thereby lessening the likelihood that the resiliency of the contact pin will be reduced to the point that the pin no longer contacts the inserted memory media card. Alternatively, or additionally, the contact pins may be angled or shaped such that damage due to the abrupt removal of an improperly (or properly) inserted card is reduced or eliminated. For example the terminal end of the contact pin may be angled or curved toward the planar surface from which the contact pin protrudes, or may be spherically shaped.

Adapter **300** includes planar element **330** that has standard connector **340** mounted thereon. Planar element **330** is adjacent to bottom planar element **320**. Standard connector **340**, which may be for example, a compact flash, PCMCIA, USB, or serial ATA connector is surface-mounted to planar element **330**. Interconnects **312** that electrically connect the standard connector **340** to contact pins **315** are also located on planar element **330**. The adapter connects the proper pin from the contact pins to planar element **330**. Simple wiring such as individual wires, flat cables, printed-circuit board (PCB), or wiring traces can be used. In accordance with an embodiment of the present invention, the need for a straddle-mounted PCB, and its associated manufacturing costs and complexity, is eliminated. Moreover, by eliminating the layers of a straddle-mount configuration, registration accuracy is improved. For one embodiment, a single PCB may comprise bottom planar element **320** and planar element **330**.

For one embodiment, a multi-memory media adapter having only 21 pins is used to accommodate various commercially available flash memory media. FIG. **4** is a table of pin mappings for the SmartMedia, MMC/SD, and Memory Stick to a 21-pin connector in accordance with one embodiment of the present invention.

Pin **18** is a ground pin for each connector. Pin **19** is a power pin for SmartMedia, while pin **20** is a power pin for MMC/SD, and Memory Stick.

The SmartMedia interface has a parallel data bus of 8 bits. These are mapped to pins **18**. While no separate address bus is provided, address and data are multiplexed. Control signals for latch enables, write enable and protect, output enable, and ready handshake are among the control signals.

For the Memory Stick and MMC/SD flash-memory-card interfaces, parallel data or address busses are not present. Instead, serial data transfers occur through serial data pin DIO, which is mapped to pin **7** for the Memory Stick, and pin **10** (DO) for the MMC/SD flash-memory-card interfaces. Data is clocked in synchronization to clock MCLK and CLK, for Memory Stick and MMC/SD, respectively, on pin **21**. A BS, for Memory Stick, occupies pin **6**, and a command signal CMD, for MMC/SD, occupies pin **4**. The Memory Stick

6

interfaces require only 4 pins plus power and ground, while MMC/SD requires 8 pins plus power and ground.

Thus, it is possible to accommodate SmartMedia, MMC/SD, and Memory Stick with a 21-pin connector (i.e., instead of 41 pins) by multiplexing the available pins. For one embodiment, the controller chip (e.g., controller chip **231**) differentiates the pin configuration for each flash memory media type. The controller may include a shifter connected to the data and clock signals from the MMC/SD and Memory Stick flash-memory cards. The shifter may clock one bit (serial) or word (parallel) of data each clock pulse. A cyclical redundancy check (CRC) can be performed on the data to detect errors.

For an alternative embodiment, a multi-memory media adapter, having only 18 pins, is used to accommodate various commercially available flash memory media including media that have recently become commercially available. Such recent additions include a miniSD card (i.e., an MMC/SD card with a smaller form factor), an MS Duo (i.e., a Memory Stick card with a smaller form factor), a Reduced Size MultiMedia Card (RSMMC), and an xD card (a controller-less Flash media, similar in function to SmartMedia).

FIG. **5** is a table of pin mappings for the xD, standard MMC/SD, standard Memory Stick, SmartMedia, miniSD, RSMMC, MMC/SD, and MS Duo to an 18-pin connector in accordance with one embodiment of the present invention.

For such an embodiment, pin **1** is a ground pin and pin **18** is a power pin for each connector. The data lines for the SmartMedia and xD interface cards have a parallel data bus of 8 bits denoted as DO-D7 that occupy pins **10-17**. These data bus lines are multiplexed to serve as card-detect lines for the remaining media types.

As described in application Ser. No. 09/610,904 (now U.S. Pat. No. 6,438,638), the signal lines to the controller are normally pulled high. When a card is inserted, the card pulls its connected pins low. Detection of card type is determined by detection of which of the mapped card detect lines is pulled low as illustrated in FIG. **5**, or by the (binary) state of data or other card pins mapped to a common set of controller pins as described in the aforesaid parent application. See, e.g., FIGS. 4A-E of 09/610,904, now U.S. Pat. No. 6,438,638. While no separate address bus is provided, address and data are multiplexed.

The data lines of the miniSD and RSMMC and the Memory Stick (and MS Duo) flash-memory-card interfaces are denoted as SDD0-SDD3 and MSD0-MSD3, respectively, and occupy pins **4-7**.

Thus, it is possible to accommodate xD, standard MMC/SD, standard Memory Stick, SmartMedia, miniSD, RSMMC, MMC/SD, and MS Duo with an 18-pin connector by multiplexing the available pins. Again, the controller chip may differentiate the pin configuration for each flash memory media type.

FIG. **6** illustrates an integrated standard connector adapter card according to one embodiment of the present invention in front view, top view, and bottom view. Adapter card **600**, shown in FIG. **6**, includes two housings, namely housing **610** and housing **620**. For one embodiment of the invention, the pins are in a single row. As shown from the top view of adapter card **600**, a top-front set of pins **611** in housing **610** can be used to interface to an xD card, a top-rear set of pins **612** in housing **610** can be used to interface to a SmartMedia card. A top-front set of pins **621** in housing **620** can be used to interface an RSMMC card. As shown in the bottom view of adapter card **600**, a bottom-front set of pins **613** in housing **610** can be used to interface to an SD/MMC MMC/SD card, a bottom-rear set of pins **614** in housing **610** can be used to

7

interface to a standard size Memory Stick card. A bottom-front set of pins **622** in housing **620** can be used to interface a miniSD card. A bottom-rear set of pins **623** in housing **620** can be used to interface a Memory Stick MS Duo.

FIG. 7 illustrates an integrated standard connector adapter card, according to one embodiment of the present invention, in front view and top view. Adapter card **700**, shown in FIG. 7, includes three housings, namely section **710** (Memory Stick), section **720** (SM/xD), and section **730** (MMC/SD). This arrangement allows pins to be laid out in a planar fashion, thus effecting saving in layout and allowing for assignment of one drive for each section. The spacing is designed so that only one media can be inserted at a time. For one embodiment, the Memory Stick could be on the top portion of section **710** (with MS Duo on the bottom portion), while SmartMedia is on the top portion of section **720** with xD on the bottom portion of section **720**. According to one such embodiment, the MMC (including the recently designed 8-bit MMC) could be on the top-rear portion of the MMC/SD section **730**, while the SD could be on the bottom-rear portion of the MMC/SD section **730**. RSMMC could be on the top-front portion of the MMC/SD section **730** and miniSD could be on the bottom-front portion of the MMC/SD section **730**.

FIG. 7A illustrates an alternative embodiment of an adapter **700A** in accordance with one embodiment of the invention. As shown in FIG. 7A, adapter **700** includes sections **710**, **720**, and **730** with sections **710** and **730** positioned vertically, but section **720** stacked horizontally upon section **730**. In such an embodiment, external pins **711**, **721**, and **731** may be positioned as shown to avoid intersection or congestion of the external connections.

As described above in reference to FIG. 3, an adapter in accordance with one embodiment of the invention includes a planar element that may have a controller chip attached to a standard connector (e.g., PCMCIA, USB, WiFi, Firewire, IDE, CF, or serial ATA connector) mounted thereon. In accordance with an alternative embodiment of the invention, the controller chip is integrated into the housing of the adapter. For example, the adapter may be formed of a single piece of molded plastic, with the controller chip and an associated memory device (e.g., ROM) embedded into the molded plastic. For such an embodiment, the continuous molded plastic that forms the adapter also forms the device package for the controller die.

#### General Matters

Embodiments of the present invention provide an improved configuration for a multi-memory media adapter card. For one embodiment, the adapter may comprise an injected plastic part, forming the mechanical port, as well as holding any and all contacts in its structure, thus eliminating the multiple tolerances of conventional configurations (i.e., two PCBs sandwiching a mechanical frame). For one embodiment, two half shells with integrated contacts are snapped together, allowing for a simple, but accurate mounting by means of guides for snapping them together. In particular, the total assembly of the port may be composed of two parts, a top and bottom, each with contacts and plastic, each containing part or the entire port opening, hence reducing the number of added tolerances to a maximum of one or two. By reducing the number of sub-assemblies from three or more to two or less, an easier, more precise manufacturing can be done, with only slightly higher tooling cost. However, due to the fact that it is a high-volume, commodity-type device, the higher tooling costs would be more than offset by the lower part cost, the better yield, etc. Further, by embedding the contacts in a plastic injection, such problems as metal fatigue, travel, etc., can be controlled much better, improving dramati-

8

cally the life-cycle time for the port side connectors. For one embodiment of the invention, the controller and associated memory device are integrated into the adapter, rendering the adapter a complete card reader.

For one embodiment, a light pipe may be locked in place between the two half shells to conduct light from a signal lamp (e.g., LED) on the PCB to the user side of the opening, similar to networking lights sometimes integrated into networking connectors.

For one embodiment, the straddle-mount configuration is replaced with a surface mounted standard connector. This reduces the manufacturing costs and complexities associated with the straddle-mount configuration.

For one embodiment of the invention, the controller and associated memory device are integrated into the adapter rendering the adapter a complete card reader.

Embodiments of the present invention have been described in reference to flash media such as xD, standard MMC/SD, standard Memory Stick, SmartMedia, miniSD, RSMMC, and MMC/SD, and MS Duo. In general, embodiments of the invention are applicable to any generic flash media.

While the invention has been described in terms of several embodiments, those skilled in the art will recognize that the invention is not limited to the embodiments described, but can be practiced with modification and alteration within the spirit and scope of the appended claims. The description is thus to be regarded as illustrative instead of limiting.

The invention claimed is:

#### 1. A multi-flash-card reader comprising:

a plurality of connectors (**62**, **64**, **66**, **68**) each having a respective slot adapted to removably receive a flash memory card;

characterised by comprising a converter chip (**40**) connected to the connectors and adapted to convert signals from a flash-memory card currently inserted in one of said connectors to read data from the flash-memory card;

the converter chip having an interface (**100**) for outputting data read from the flash-memory card;

the plurality of connectors comprising at least first and second connectors (**64**; **62**), the first connector (**62**) having a parallel data bus and control signals for parallel data transfer from a type of flash-memory card providing parallel data access in which a parallel data bus and an address bus are used to access data, hereafter referred to as a parallel card (**16**), and the second connector (**64**) having at

least one serial data pin and a clock pin for controlling serial data transfer from a type of flash-memory card, hereafter referred to as a serial card (**28**), in which one or more data lines are each clocked in synchronization with a clock signal so that one bit or one word of data is transferred for each clock;

wherein the converter chip is adapted to control clocked data transfer for serial cards and parallel data bus transfer for parallel cards, whereby multiple types of flash-memory card can be read by the multiflash-card reader using the converter chip;

the converter chip further comprising a shifter (**98**) connected to data and clock signals (DATA; CLK)

from the second connector and adapted to clock in one bit of data for each clock pulse when the serial card (**28**) is of a first type providing bit by bit data access and to clock in one word of data for each clock pulse when the serial card (**26**) is of a second type providing word by word data access.



9

2. A multi-flash-card reader as claimed in claim 1 wherein the first type of serial card is a MultiMediacard and wherein the second type of serial card is a Secure Digital Card.

3. A multi-flash-card reader as claimed in any preceding claim wherein the shifter further comprises

means for performing a cyclical redundancy check, CRC, on the data to detect errors.

4. A multi-flash-card reader as claimed in claim 1 wherein the plurality of connectors further comprises a third connector (66) connected to the converter chip and having a parallel data bus and control signals for controlling parallel data transfer from a parallel card of a second type removably inserted in the third connector.

5. A multi-flash-card reader as claimed in claim 4 wherein the plurality of connectors comprises a fourth connector having a serial data pin and a clock pin for controlling serial data transfer from a serial card of a third type removably inserted in the fourth connector.

6. A multi-flash-card reader as claimed in claim 5 wherein the first connector is adapted to receive the parallel card comprising a CompactFlash card, the second connector is adapted to receive a serial card comprising anyone of a first

10

type being a MultiMedia card and a second type being a Secure Digital card; the third connector is adapted to receive the second type of parallel card being a Smart Media card; and the fourth connector is adapted to receive a third type of serial card being a Memory Stick card.

7. A multi-flash-card reader as claimed in claim 1 wherein the interface is adapted to connect to a host computer via an external cable.

8. A multi-flash-card reader as claimed claim 1 wherein the interface is adapted for connection to a host via a cable which is internal relative to a housing of the multi-flash-card reader.

9. A multi-flash-card reader as claimed in claim 1 wherein the plurality of connectors each have card detect signals for detecting the presence of a flash memory card inserted into said connector;

wherein the converter chip is adapted to sense a voltage change in the card detector signals from a connector and to activate a routine to access the flash memory card activating the card detect signals, whereby flash memory cards are detected by the converter chip.

\* \* \* \* \*